





Připojení střídačů GoodWe a AEG k síti Wi-Fi


Návod na připojení střídačů GoodWe a AEG k Wi-Fi

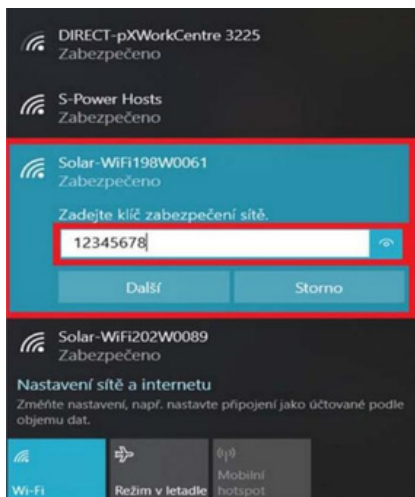

- Otevřete nastavení Wi-Fi ve vašem počítači nebo chytrém telefonu • Vyhledejte síť s názvem **Solar-WiFi** a připojte se Klíč k síti je nastaven výchozí **12345678**


- Otevřete internetový prohlížeč
- Do vyhledávání zadejte adresu <http://10.10.100.253/>

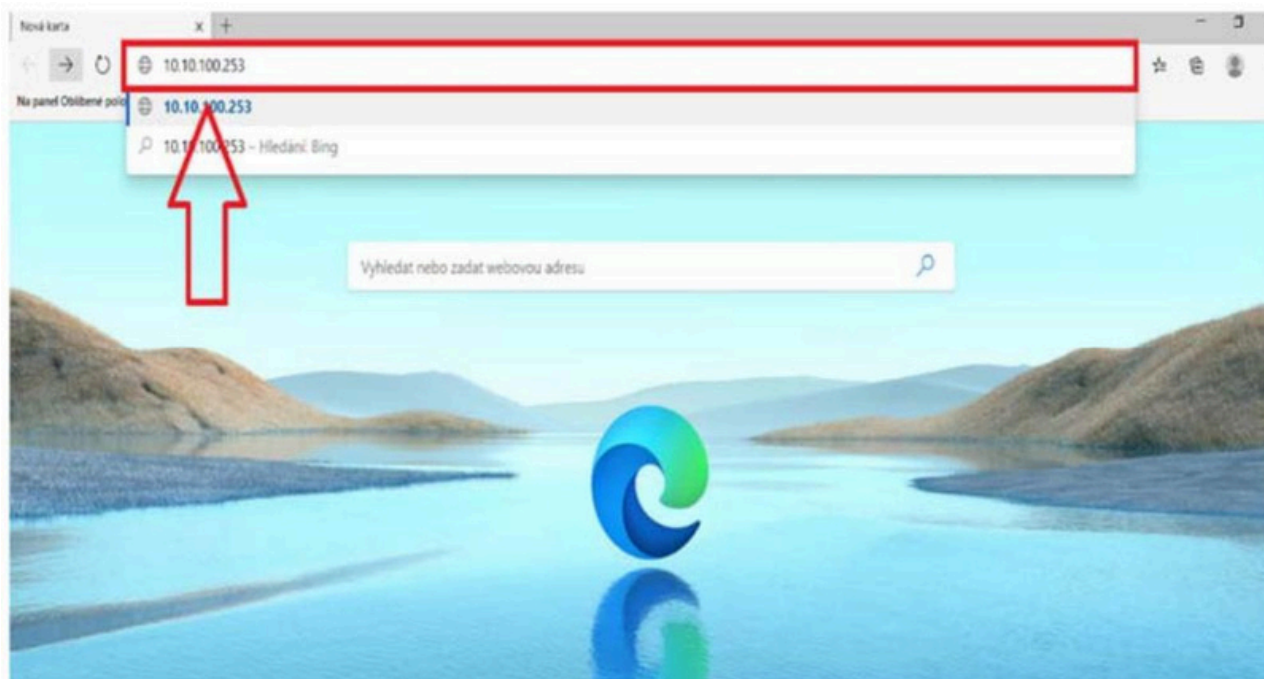

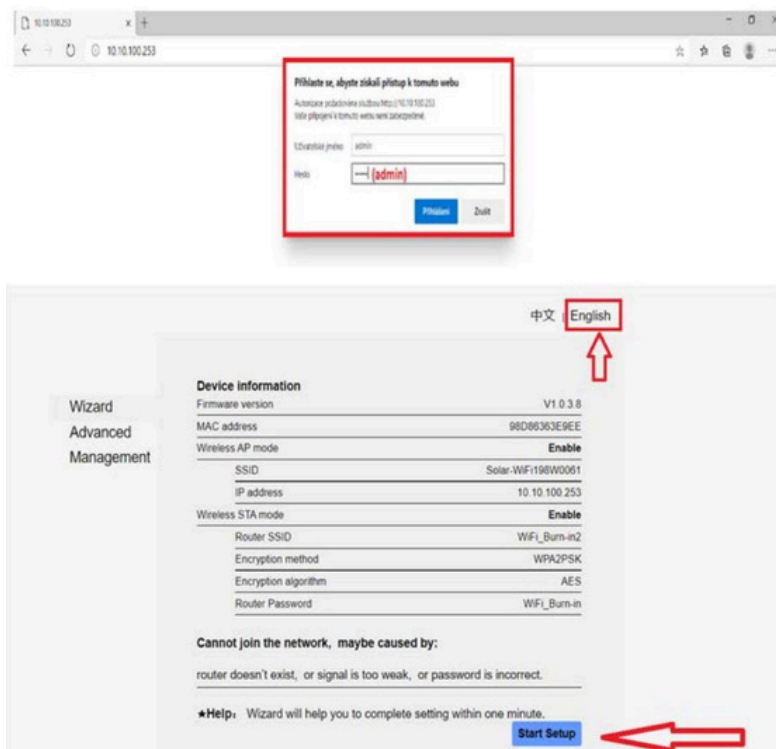


- Po zadání adresy vyskočí přihlašovací okno
- Uživatelské Jméno: **admin**
- Heslo: **admin**
- Na úvodní stránce přepněte jazyk na angličtinu
- Poté klikněte na **Start Setup**

- V nabídce se objeví dostupné sítě v okolí
- Vyberte síť, ke které chcete střídač připojit
- Klikněte na **Next**

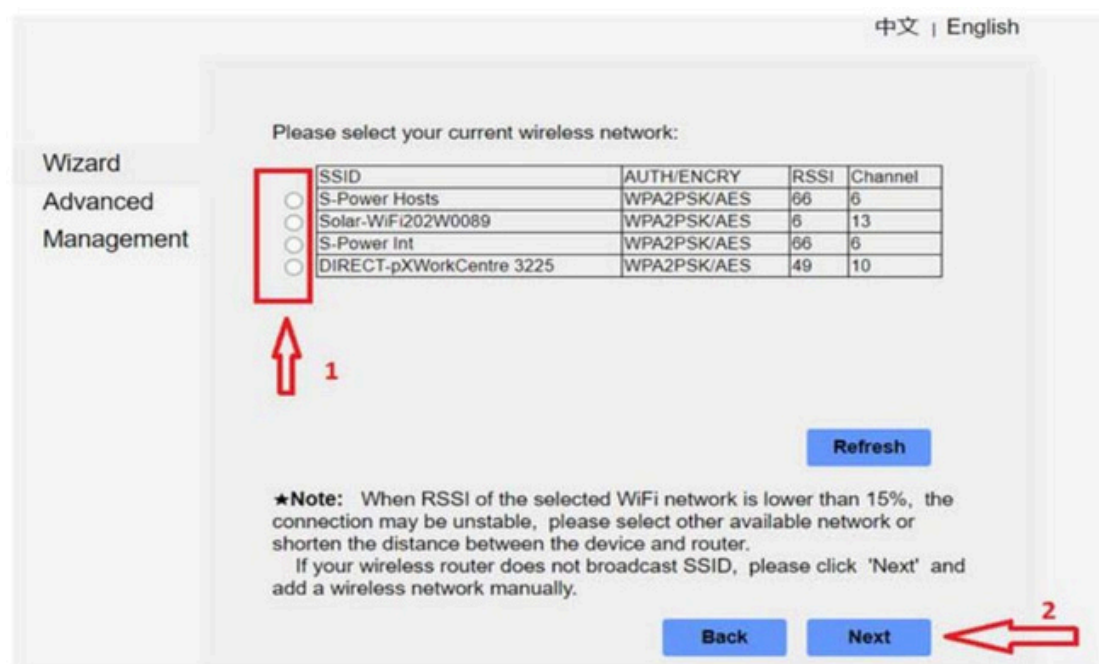

- Zadejte heslo sítě, ke které chcete střídač připojit
- Klikněte na **Next**

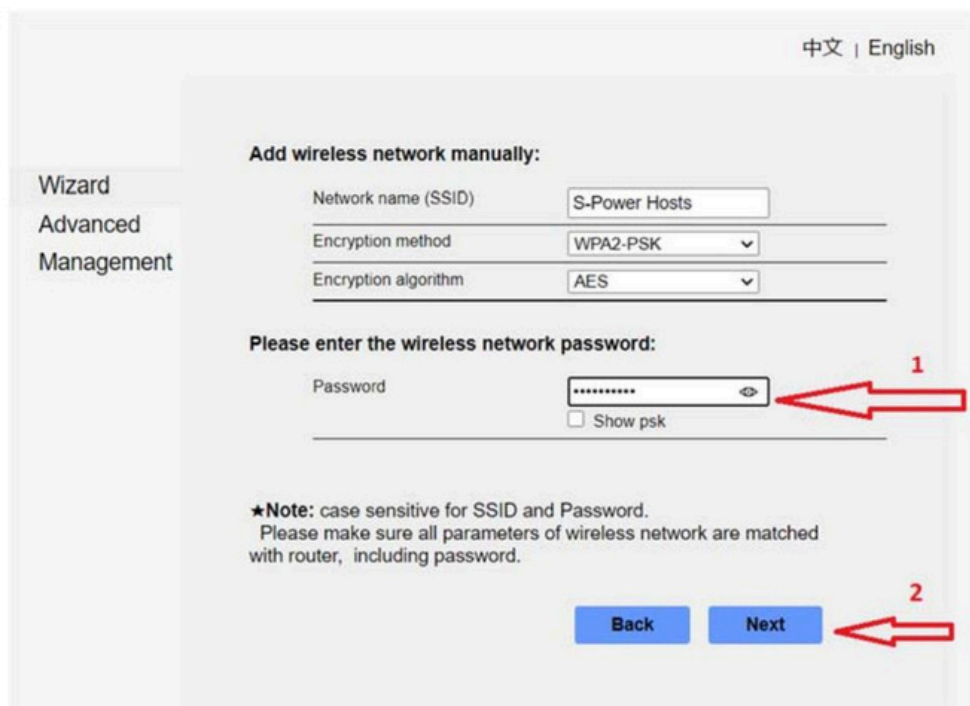

中文 | English

Wizard
Advanced
Management

Add wireless network manually:

Network name (SSID)

Encryption method


Encryption algorithm

Please enter the wireless network password:

Password ☐ Show psk

★Note: case sensitive for SSID and Password.
Please make sure all parameters of wireless network are matched with router, including password.

- Po zápisu dat se Solar-WiFi restartuje a je hotovo

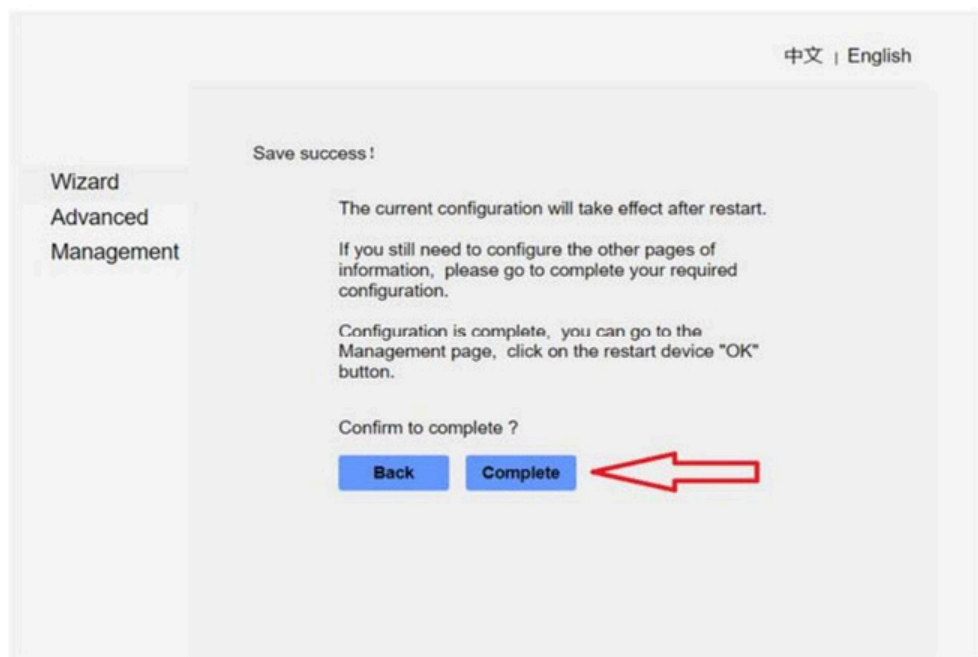

中文 | English

Wizard
Advanced
Management

Save success!

The current configuration will take effect after restart.

If you still need to configure the other pages of information, please go to complete your required configuration.

Configuration is complete, you can go to the Management page, click on the restart device "OK" button.

Confirm to complete ?